




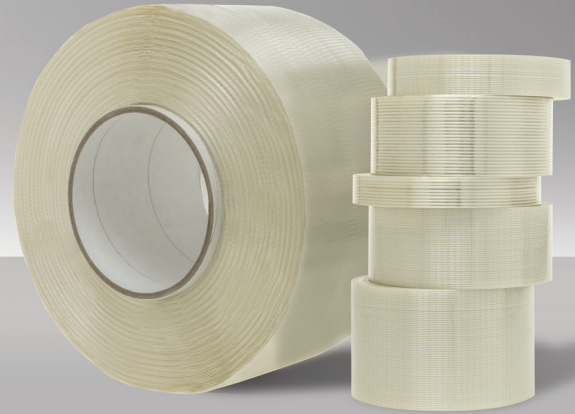




FILAMENT TAPES

INFORMATIVE
DATA SHEET



	 backing thickness µm	 total thickness µm	 adhesion N/cm	 breaking load N/cm	 heavy weight packaging
NARFIL 500	28	120	> 8	> 220	•
NARGLASS 532	28	120	> 8	> 170	•
NARGLASS 539	28	130	> 8	> 220	•

It is good practice to use the product within 12 months from purchase date (6 months if jumbo roll). The rolls must be kept in their original packing. Keep the product out of the light and protect from direct heat sources. The tape must be kept in a dry place, at humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it.

The values in the informative data sheets are the average results of tests made on our standard production and are not legally binding. The aesthetic and technical features may be subject to some changes caused by ageing, even though the quality level of the product is maintained. Nar shall not be liable for direct damages or for any consequence arising from the misuse of the product. We suggest the verification of the product suitability to the specific condition of use.

Additional indications are available in the last edition of the booklet "Recommendation regarding choice, storing and use of pressure sensitive tapes" published by Federazione Gomma Plastica.



[www.nar-spa.com/
technical-notes.html](http://www.nar-spa.com/technical-notes.html)



NARFIL 500

INFORMATIVE
DATA SHEET



MADE IN ITALY

FILAMENT TAPES

COMPOSITION

BACKING: biaxially oriented polypropylene film reinforced with longitudinal glass fibres
ADHESIVE: synthetic rubber / hydrocarbonic resins
CORE: recycled paper and paperboard

SUITABLE FOR

Heavy packaging; binding things; palletizing


AVAILABLE COLOURS

Transparent

The high performance hot melt adhesive and the glass fiber reinforced backing make this product the ideal choice for all packaging needs, also the heaviest.



ADHESION
> 8 N/cm



BREAKING LOAD
> 220 N/cm



HEAVY WEIGHT
PACKAGING



ORGANIC SOLVENTS FREE



NAR S.P.A.
Legnaro (PADOVA)
ITALY
www.nar-spa.com

Member of:



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

LEGNARO - SCHIO - BRUGINE

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV GL
= ISO 14001:2015 =

LEGNARO

COMPANY WITH ENERGY
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 50001:2011 =

LEGNARO



NARGLASS 532

INFORMATIVE
DATA SHEET



MADE IN ITALY

FILAMENT TAPES

COMPOSITION

BACKING: biaxially oriented polypropylene film reinforced with cross weaved glass fibres

ADHESIVE: synthetic rubber / hydrocarbonic resins

CORE: recycled paper and paperboard


SUITABLE FOR

Heavy packaging; binding things; palletizing


AVAILABLE COLOURS

Transparent

The high performance hot melt adhesive and the glass fiber reinforced backing makes this product the ideal choice for all packaging needs, also the heaviest.



TOTAL THICKNESS
120 μ m



BREAKING LOAD
> 170 N/cm



HEAVY WEIGHT
PACKAGING



ORGANIC SOLVENTS FREE



NAR S.P.A.
Legnaro (PADOVA)
ITALY
www.nar-spa.com

Member of:



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

LEGNARO - SCHIO - BRUGINE

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV GL
= ISO 14001:2015 =

LEGNARO

COMPANY WITH ENERGY
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 50001:2011 =

LEGNARO



NARGLASS 539

INFORMATIVE
DATA SHEET



MADE IN ITALY

FILAMENT TAPES

COMPOSITION

BACKING: biaxially oriented polypropylene film reinforced with cross weaved glass fibres

ADHESIVE: synthetic rubber / hydrocarbonic resins

CORE: recycled paper and paperboard


SUITABLE FOR

Heavy packaging; binding things; palletizing


AVAILABLE COLOURS

Transparent

The high performance hot melt adhesive and the glass fiber reinforced backing make this product the ideal choice for all packaging needs, also the heaviest.



TOTAL THICKNESS
130 μ m



BREAKING LOAD
> 220 N/cm



HEAVY WEIGHT
PACKAGING



ORGANIC SOLVENTS FREE



NAR S.P.A.
Legnaro (PADOVA)
ITALY
www.nar-spa.com

Member of:



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

LEGNARO - SCHIO - BRUGINE

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV GL
= ISO 14001:2015 =

LEGNARO

COMPANY WITH ENERGY
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 50001:2011 =

LEGNARO